


At a Glance

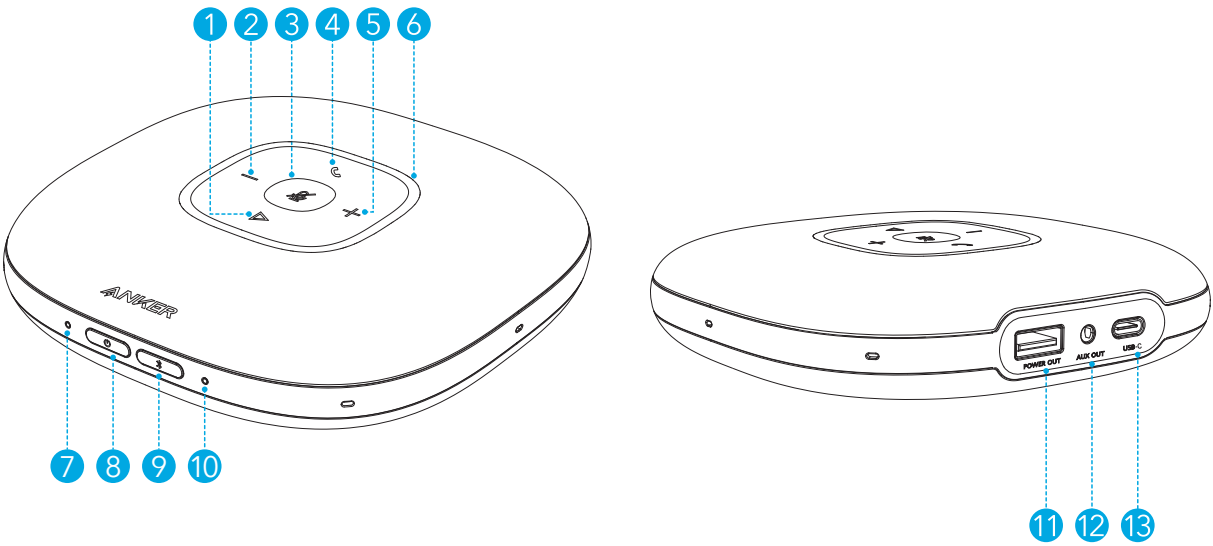

1	Multi-function Button	8	Power Button
2	Volume Down Button	9	Bluetooth Button
3	Mute Button	10	Bluetooth LED
4	Phone Call Button	11	USB-A Port for Charge-Out
5	Volume Up Button	12	Audio Output Port
6	Status LED	13	USB-C Port for Charge-In and Connection to PC
7	Power LED		

AnkerWork App


Download the AnkerWork app to enhance your experience.



Google Play and the Google Play logo are trademarks of Google Inc.




Apple and the Apple logo are trademarks of Apple Inc.

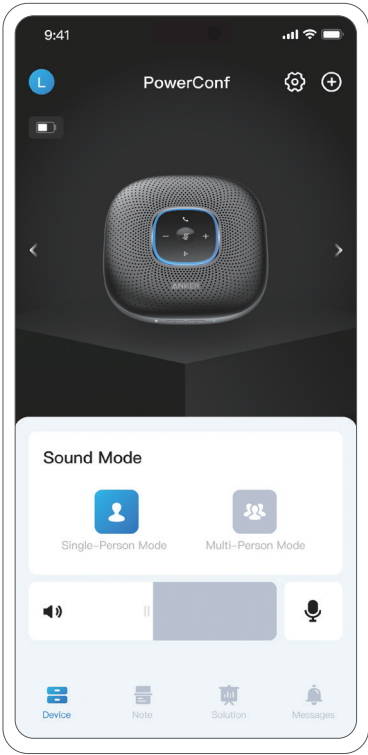

Powering On/Off


- Press and hold the power button for 2 seconds to power on. The status LED will turn on clockwise and then fade out.
- To power off, press and hold the power button for 2 seconds.
 - The product will automatically power off after 30 minutes of inactivity or if it is not connected to an input source.

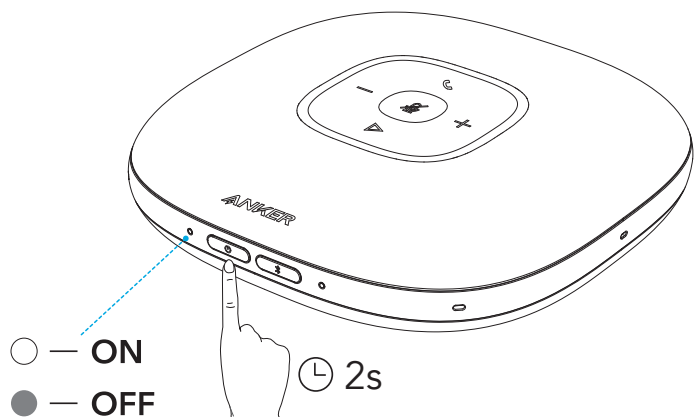

Connecting


Plug-and-Play

- Connect to your computer via the USB-C port using a USB cable.
- Once connected to your computer, the product will automatically power on.

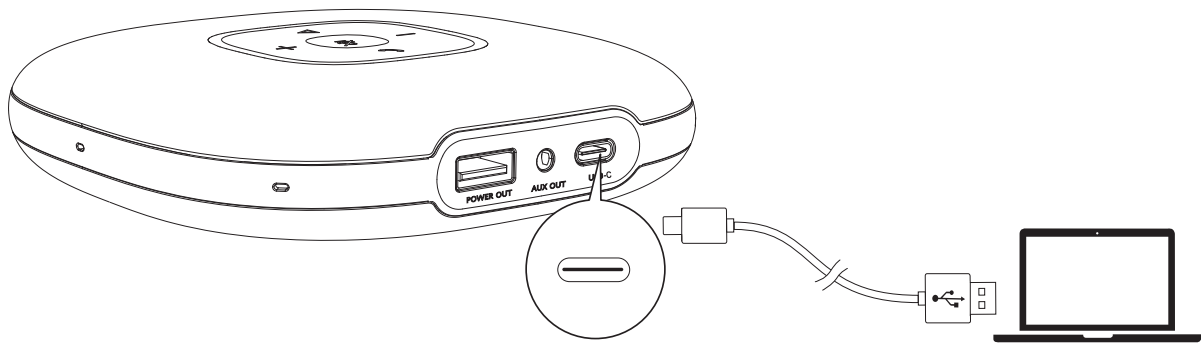

Bluetooth Pairing

- Press the Bluetooth button to enter Bluetooth pairing mode, then select "Anker PowerConf" from the Bluetooth list to connect.
- Each time you power on the product, it will automatically connect with the last successfully connected device if available.

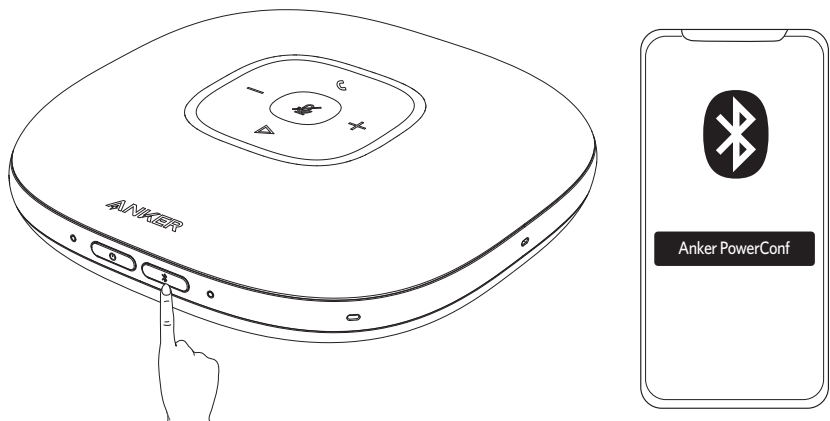






	Press	Enter / Exit Bluetooth Pairing Mode
	Flashing Blue	Bluetooth Pairing
	Steady Blue	Bluetooth Connected



When the speakerphone is connected to two devices simultaneously via USB and Bluetooth, press and hold the multi-function button for 2 seconds to switch between two modes.

Button Controls


	Press and Hold for 2 Seconds	Power On / Off
	Press	Volume Up / Down
	Press	Answer / End a Call
	Press and Hold for 2 Seconds	Reject a Call
	Press	Mute or Unmute the Microphone
	Press	Play / Pause




Status LED

Lights up white for 2 seconds	USB connected to computer
Breathes green	Incoming call
Lights up blue partially	Sound direction detected
Lights up blue clockwise or counterclockwise	Increase or decrease volume
Turns red	Muted
Lights up green	Press power button to check the battery level

Charging

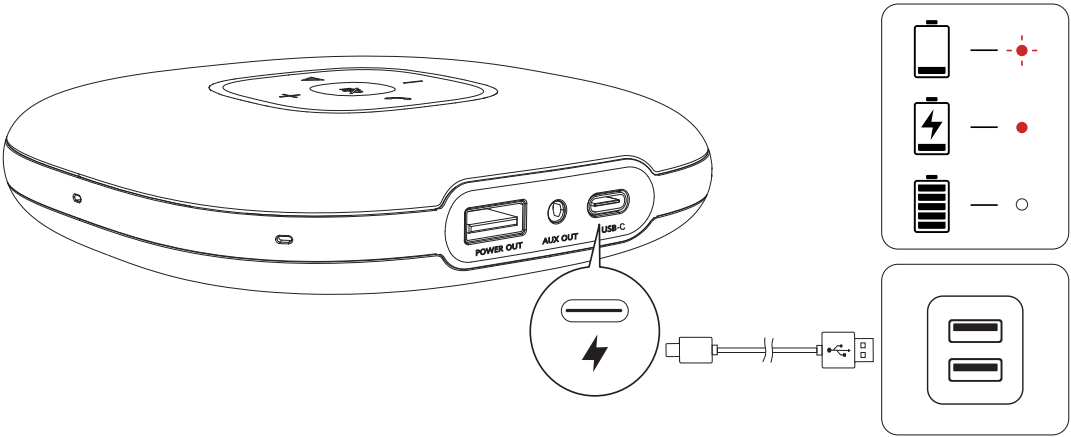
Recharge your PowerConf



	Flashing Red	Low Battery
	Steady Red	Being Charged
	Light Off	Fully Charged


Charge an External Device

- When powered off or being charged, PowerConf won't have an output charge.
- When the remaining battery is less than 30%, the charge output current will be $5V \approx 1A$; if less than 10%, it won't have an output charge.

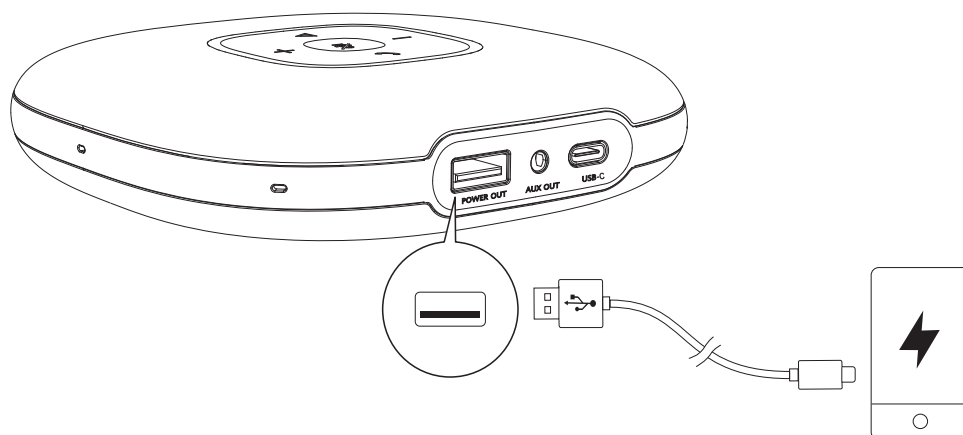

Audio Output

Connect to an external speaker using an AUX cable (not included). The audio will be played through the speaker.

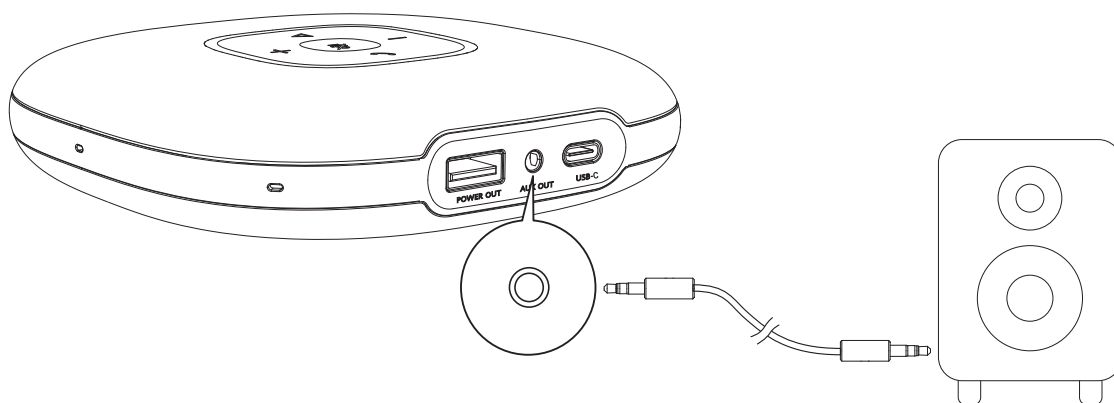

Specifications

- Specifications are subject to change without notice.

Charge Input	$5V \approx 2A$
Charge Output	$5V \approx 2.1A$
Rated Output Power	3W RMS
Battery Capacity	5200 mAh
Charging Time	4 hours
Talktime	24 hours
Driver Size	1 x 1.75" (full range)
Frequency Response	20 Hz - 20 kHz
Bluetooth Version	V 5.0
Bluetooth Range	10 m / 33 ft

Hereby, Anker Innovations Limited declares that this device is in compliance with The Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023. For the Statement of Compliance, visit the website: <https://www.anker.com/uk/psti-related>.

Note: The 'x' of SN Code: xxxxxxxxxxxxxxxx is a variable, see below table.

Variable 'x'	Range of variable	Content
Seventh	0-9 or A-F	Denotes the hardware version which is not effected on the safety compliance.
Eighth	8,9,A,B,C...	Denotes the year, 8 means 2018, 9 means 2019, A means 2020, B means 2021, C means 2022, and so on.
Ninth and tenth	01,02,03...	Denotes weeks, 01 means the first week in this year, 02 means the secondary week in this year, and so on.
Eleventh	1-7	Denotes date, 1 means Monday, 2 means Tuesday..., 7 means Sunday and so on.
The last five	00001-99999	Denotes serial No.

1. Power consumption in standby mode: $\leq 0.5W$

2. Power management: $\leq 20min$

3. Information of applicable adapter:

Brand: ANKER

Manufacturer: Anker Innovations Limited

Model: A2337

Input: 100-240V~ 1.0A, 50-60Hz

Output: 5.0V \rightleftharpoons 3.0A 15.0W / 9.0V \rightleftharpoons 3.0A 27.0W / 12.0V \rightleftharpoons 2.5A 30.0W / 15.0V \rightleftharpoons 2.0A 30.0W / 20.0V \rightleftharpoons 1.5A 30.0W (30.0W Max)

Default Open Port: Classic Bluetooth

Port Description: After the device is powered on, Classic Bluetooth visibility (or pairing mode) is automatically enabled, providing Bluetooth pairing (or control) services. The Bluetooth service is disabled when the device is powered off.