

What's in the Box

Overview

Recharging Your Power Station

Powering Your Devices

Uninterruptible Power Supply (UPS)

Connect with an Expansion Battery

The Anker App for Smart Control


Light

LCD Screen Guide


FAQ

Specifications

What's in the Box



Anker SOLIX F2000
Portable Power Station
(PowerHouse 767)



Solar Charging Cable



AC Charging Cable




Car Charging Cable



User Manual

Overview

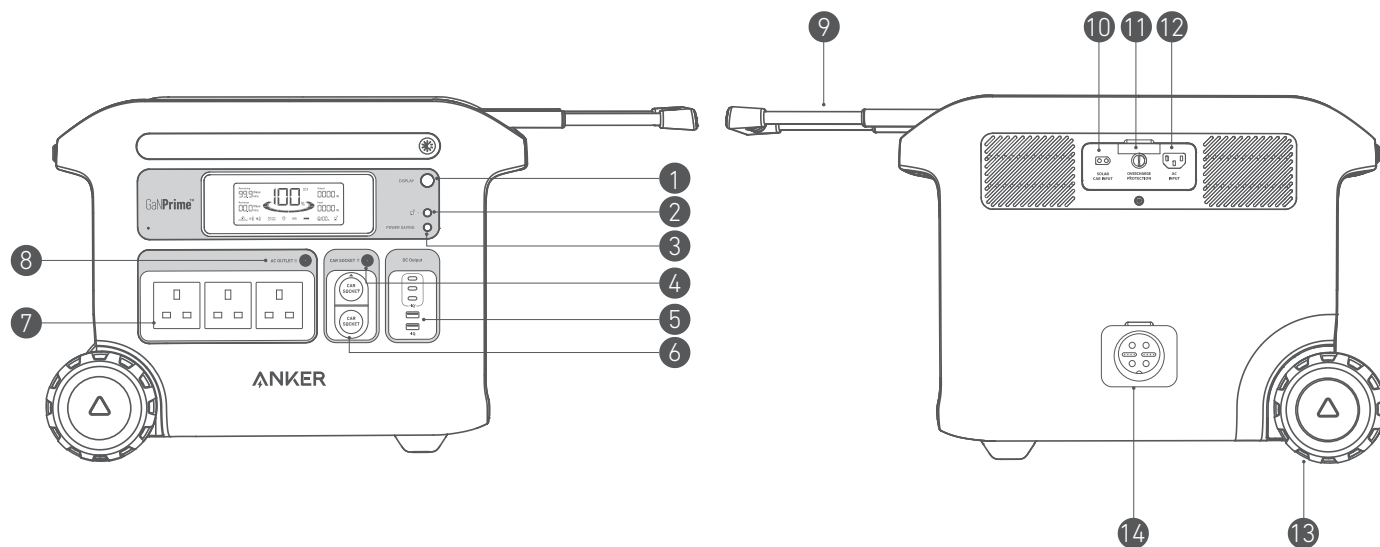


- ① Display Button
- ② IoT Button
- ③ Power Saving Button
- ④ Car Socket Button
- ⑤ USB Ports
- ⑥ Car Sockets
- ⑦ AC Output Ports
- ⑧ AC Outlet Button
- ⑨ Retractable Handle (Press the button on the retractable handle and pull to extend)
- ⑩ Solar Input and Car Input
- ⑪ Overcharge Protection
- ⑫ AC Input Port

- 13 Wheel(s)
- 14 Expansion Battery Port

Recharging Your Power Station


AC recharging (2200W Max)

Recharge your power station by connecting to a wall outlet with the AC charging cable.

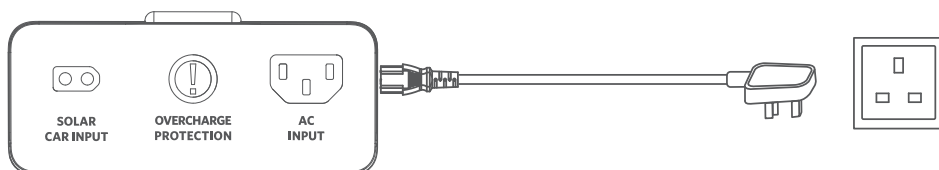


Solar Panel Recharging (1000W Max)

Recharge your power station with a maximum solar input of 1000W by connecting up to five Anker 531 Solar Panel (200W) as shown in the figure with a solar charging cable.

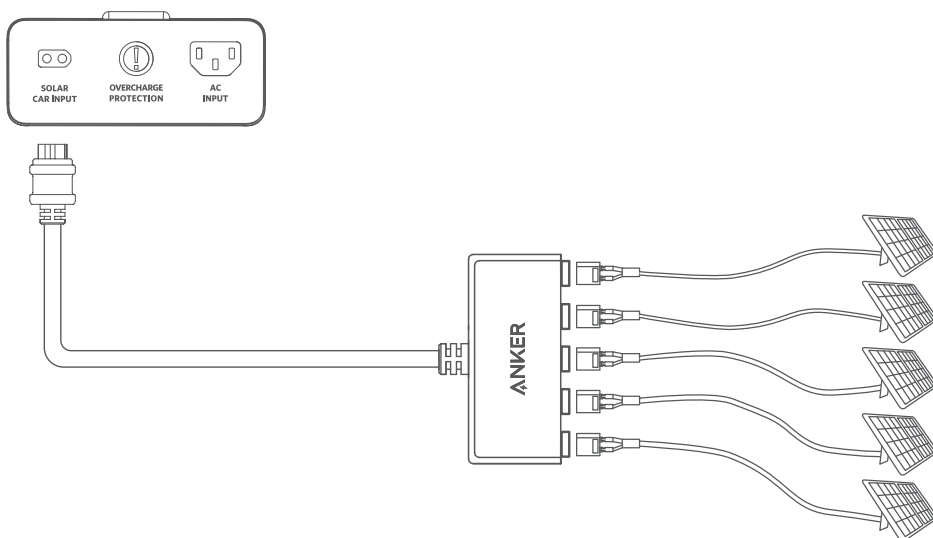

Car Recharging

Recharge your power station by connecting to a car's output port with the car charging cable.

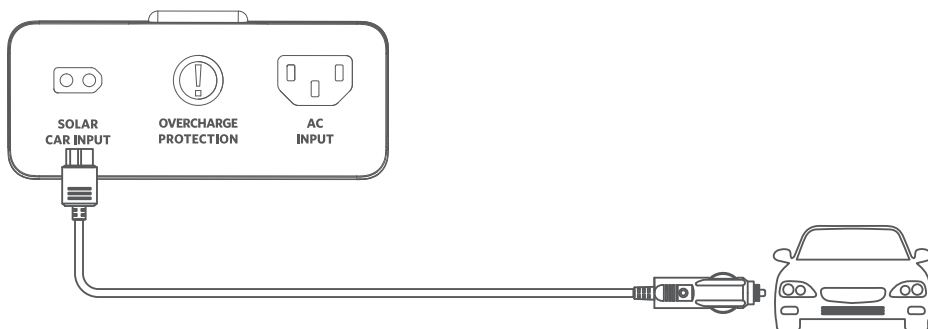

💡 When your portable power station only has 1% battery remaining, the "Remaining Battery" indicator will flicker to remind you to recharge.

Powering Your Devices

Power Saving Mode


Turning on the Power Saving mode prevents wasting energy as it automatically turns off the power station once all your devices are fully charged.

Turning off the Power Saving mode will enable stable charging over an extended period, such as for time-lapse photography or when using a CPAP machine overnight.

The AC outlets can intelligently identify whether a plug is inserted. This helps prevent power wastage by automatically turning off the power station if no plug is detected for more than 15 minutes, whether the Power Saving mode is turned on or off.


AC Charging

Press the AC outlet button and connect your devices to the AC output ports.

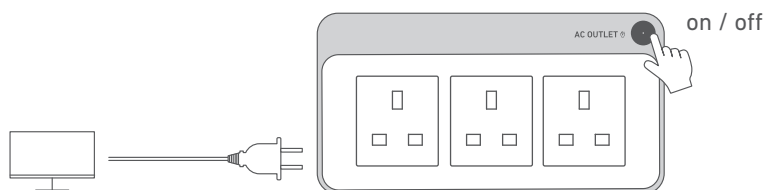


USB Charging

Connect your devices to the USB ports.

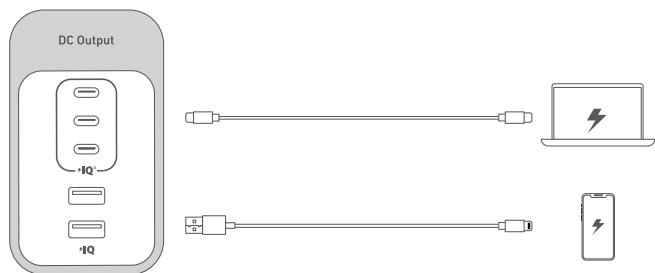


Car Socket Charging

Turn on the car socket and connect your devices to start charging.

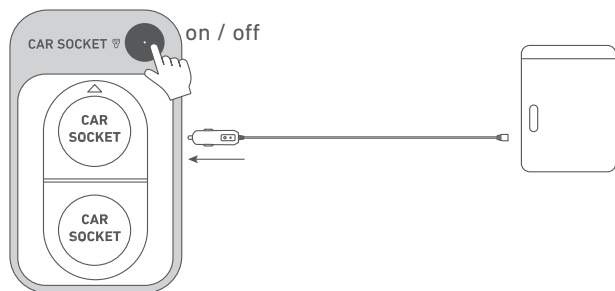


Uninterruptible Power Supply (UPS)

To use the UPS feature, connect your power station to a wall outlet with the AC charging cable, then press the AC outlet button and connect your devices via the AC output ports.

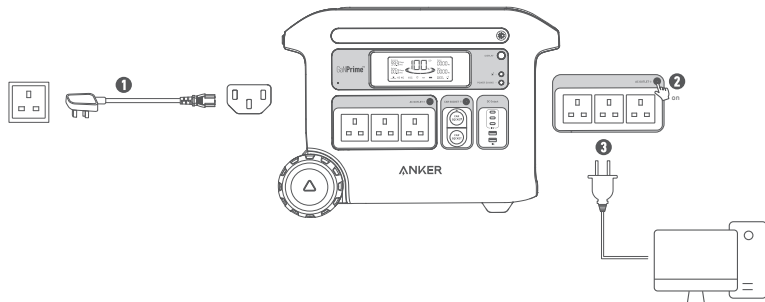

Connect with an Expansion Battery

Your power station can be connected with an expansion battery to double the capacity to 4096Wh. Please refer to the user manual of Anker 760 Portable Power Station Expansion Battery (2048Wh) for detailed instructions.

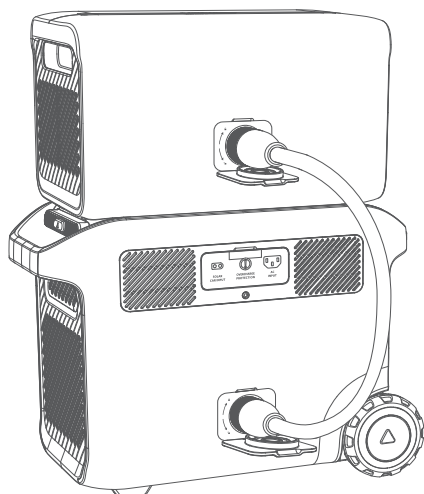

The Anker App for Smart Control

You can remotely control your power station using the Anker App. Please download the app and its user manual by scanning this QR code.


Connect the device to a network before using the app for the first time. After connecting successfully, you can connect your devices off-grid.



Light


Ambient light

Press the button once to turn on the ambient light, and press again up to 2 times to switch between brightness levels.

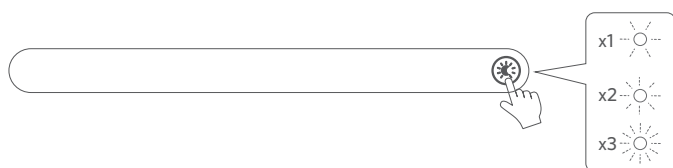


SOS Mode

Press and hold the button for 2 seconds to turn on SOS mode.



LCD Screen Guide

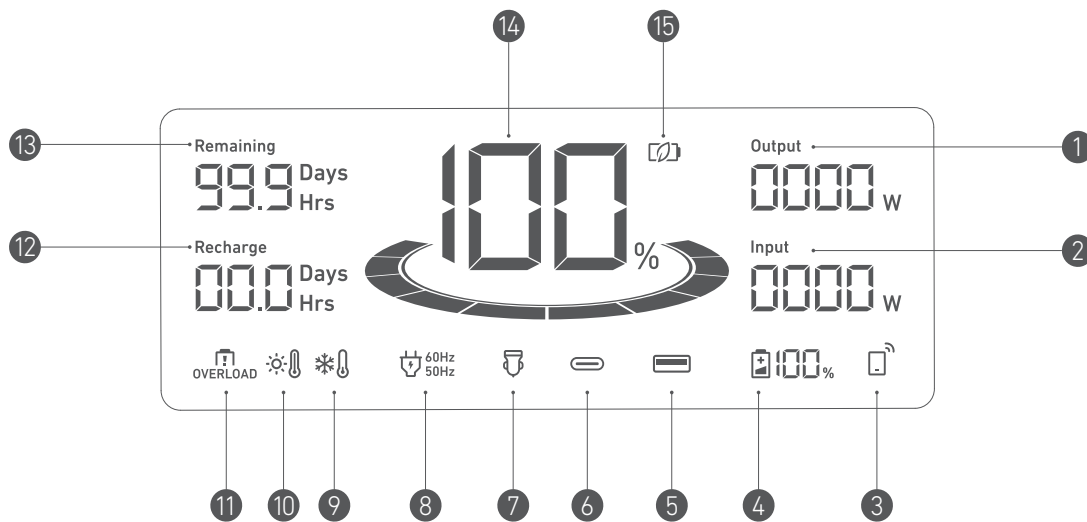

Current Output Power



Current Input Power



IoT

Press the IoT button once to turn on Bluetooth and Wi-Fi, and connect your devices through the app when this icon appears on the screen.

Press the IoT button for 2 seconds to turn off Bluetooth and Wi-Fi.

Press the IoT button for 7 seconds to reset Bluetooth and Wi-Fi.



Remaining Battery for Expansion Battery

When the expansion battery is connected successfully, this icon appears on the screen.



USB-A Output Port



USB-C Output Port



Car Charging



AC Charge and Voltage Frequency



Low-Temperature Alert

When this icon shows, stop using the power station until the icon disappears.



High-Temperature Alert

When this icon shows, stop using the power station and let it cool down until the icon disappears.



Overload Warning

This icon appears when a port is overloaded. The port will be turned off to avoid any damage. Please remove the device causing overload.



Estimated Time to Fully Recharge



Estimated Time for Battery to Deplete



Remaining Battery for Power Station



Power Saving Mode

FAQ

Q1: What is the max power output of the AC output ports?

The AC output ports can deliver a maximum of 2300W to connected devices.

Q2: Can Anker SOLIX F2000 Portable Power Station (PowerHouse 767) power a CPAP machine?

Yes, but make sure to turn off the Power Saving mode first.

Q3: What should I do when using a solar charger to charge Anker SOLIX F2000 Portable Power Station (PowerHouse 767)?


The solar input supports an 11-60V solar charger with an XT-60 connector. If you use an 11-32V solar charger, the current supports 10A max. When you use a 32-60V solar charger, the current supports 20A max. We recommend using Anker 531 Solar Panel (200W) to get the best compatibility.

Q4: Can the USB-C ports be used to charge Anker SOLIX F2000 Portable Power Station (PowerHouse 767) (input only) or are they output only?

The USB-C ports support output only.


Q5: What should I do when AC recharging fails?

If AC recharging does not work, check to see if the overload protection switch is switched on. If it is on, press down to reset and then continue recharging.

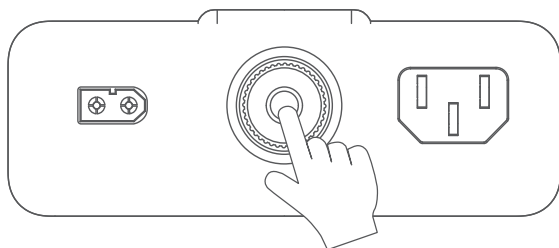

Q6: How do I reset Anker SOLIX F2000 Portable Power Station (PowerHouse 767)?

If your power station isn't working correctly, insert a paper clip or pin into the reset hole for 1 second for a factory reset. If the power station still doesn't work, please contact support@anker.com.

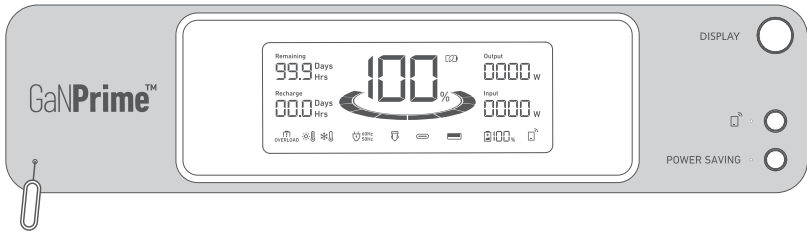

Q7: Why is the power station not working after it hasn't been used for a long time?

If the power station is stored at a low capacity for a long time, lithium batteries will self-consume power which may lead to a quick discharge. This often leads to poor conductivity and a reduced battery lifespan that causes the battery not to work.

Q8: How should I store and maintain the power station?

When storing your portable power station, please make sure that you:

- 1) Turn off all the outputs.
- 2) Store the power station in a dry and cool environment.
- 3) Check the remaining battery capacity each week. If the battery level is below 30%, fully charge the power station. Don't forget to charge it to 100% once every 3 months.

Specifications

Cell Capacity	2048 Wh
AC Input Voltage	220-240V~ 10A Max, 50Hz
AC Input Power (Charging)	2200W Max
Solar Panel Input	11-32V ∴ 10A; 32V-60V ∴ 20A (1000W Max)
Car Charger Output	12V ∴ 10A
AC Output	230V~ 10A, 50Hz, 2300W Max
USB-A Output	5V ∴ 2.4A (2.4A Max Per Port)
USB-C Output (100W)	5V ∴ 3A/9V ∴ 3A/15V ∴ 3A/20V ∴ 3A/20V ∴ 5A (100W Max Per Port)
UPS	20ms
Discharging Temperature	-4°F-104°F / -20°C-40°C
Charging Temperature	32°F-104°F / 0°C-40°C
Size	20.7 × 15.5 × 9.8 in / 52.5 × 39.5 × 25.0 cm
Net Weight	67.2 lb / 30.5 kg

Default Exposed Network Interfaces and Services

Bluetooth Low Energy (BLE) Status: When the equipment is not yet connected to a network, it will automatically enable BLE broadcasting and activate BLE services to provide Bluetooth network configuration capabilities.

Note: During the BLE configuration process, ensure your network environment is stable and follow the instructions to complete the setup.