
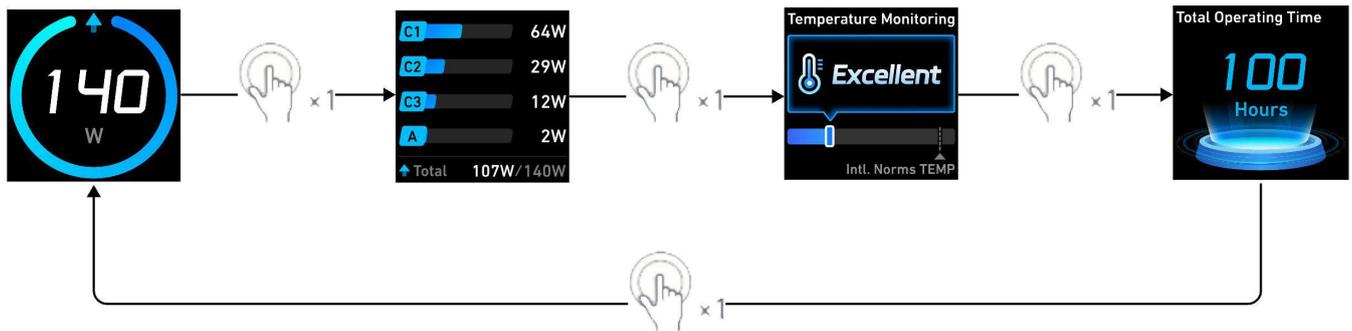


Screen Display Guide



Note: Long press to rotate screen display. The screen will turn off automatically 60 seconds after the last interaction on any interface.

Startup Screen		<p>When powered on, the screen briefly shows "140W" for 3 seconds, then displays the current total power.</p>
Power Distribution		<p>Displays power distribution.</p> <ul style="list-style-type: none"> To refresh the power distribution interface, plug or unplug devices on any screen.
Temperature Monitoring		<p>Low Temperature: The charger's temperature is relatively low at this time.</p>
		<p>High Performance: The charger's temperature rises slightly but remains well below the international standard temperature limit.</p>
		<p>Cooling Mode: The charger's temperature is relatively high at this time, and cooling mode is automatically activated. However, it still remains below the international standard temperature limit.</p>
Total Operating Time		<p>Displays the total operating time of the charger.</p> <ul style="list-style-type: none"> Activates after the charger has been in use for more than 1 hour.

Idle Screen		<p>The charger enters idle mode when powered on if no output is detected.</p>
Pop-Up Reminder		<p>Using the USB-C3 and USB-A1 ports while USB-C1 and USB-C2 ports are available will trigger a pop-up reminder.</p> <ul style="list-style-type: none"> • Close the reminder by plugging / unplugging ports or pressing the toggle button.

Specifications

Total Wattage	140.0W Max
Input	100-240V~, 50 / 60Hz, 2.6A Max
Output	<p>One Port in Use:</p> <p>USB-C1 / USB-C2: 9.0V\Rightarrow 3.0A, 27.0W / 15.0V\Rightarrow 3.0A, 45.0W / 20.0V\Rightarrow 5.0A, 100.0W / 28.0V\Rightarrow 5.0A, 140.0W (140.0W Max)</p> <p>USB-C3: 5.0V\Rightarrow 3.0A, 15.0W / 9.0V\Rightarrow 3.0A, 27.0W / 15.0V\Rightarrow 2.65A, 39.75W / 20.0V\Rightarrow 2.0A, 40.0W (40.0W Max)</p> <p>USB-A1: 5.0V\Rightarrow 3.0A, 15.0W / 9.0V\Rightarrow 2.0A, 18.0W / 12.0V\Rightarrow 1.5A, 18.0W / 10.0V\Rightarrow 2.25A, 22.5W / 11.0V\Rightarrow 3.0A, 33.0W (33.0W Max)</p> <p>Two Ports in Use:</p> <p>USB-C1 + USB-C2: 70.0W + 70.0W</p> <p>USB-C1 / USB-C2 + USB-C3: 100.0W + 40.0W</p> <p>USB-C1 / USB-C2 + USB-A1: 100.0W + 33.0W</p> <p>USB-C3 + USB-A1: 24.0W</p> <p>Three Ports in Use:</p> <p>USB-C1 + USB-C2 + USB-C3: 65.0W + 45.0W + 30.0W</p> <p>USB-C1 + USB-C2 + USB-A1: 65.0W + 45.0W + 30.0W</p> <p>USB-C1 / USB-C2 + (USB-C3 + USB-A1): 100.0W + 24.0W</p> <p>Four Ports in Use:</p> <p>USB-C1 + USB-C2 + (USB-C3 + USB-A1): 65.0W + 45.0W + 24.0W</p> <p>Total Output: 140.0W Max</p>