

What's in the Box

Overview

Installing the Battery

Removing the Battery

Recharging the Battery


Charging Your Devices

FAQ


Specifications

Warranty Policy

What's in the Box

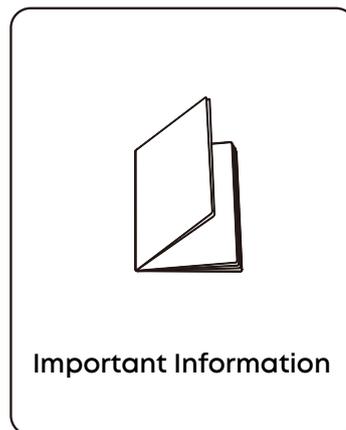

Overview

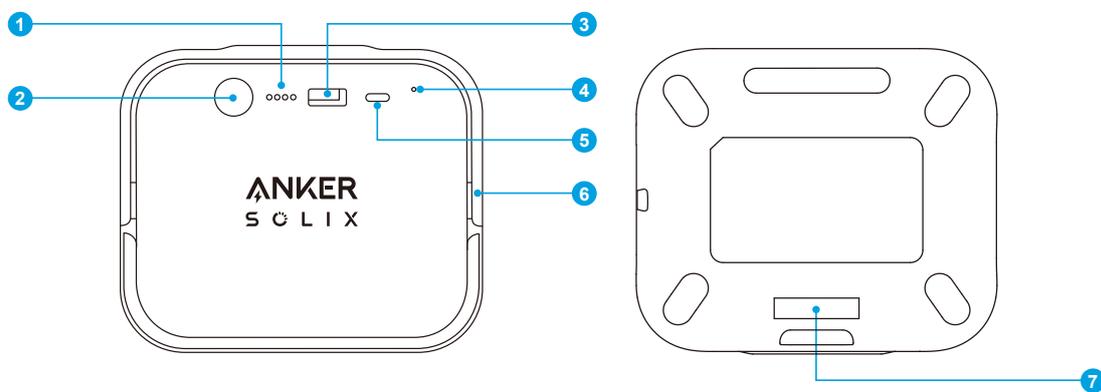


- ❶ Battery Level Indicator
- ❷ Main Power Button
- ❸ 12W USB-A Output Port
- ❹ Reset
- ❺ 60W USB-C Input / Output Port
- ❻ Handle
- ❼ Pin


Installing the Battery

💡 Install your removable battery into the cooler and recharge it to activate before using it for the first time.


1. Open the battery cover.

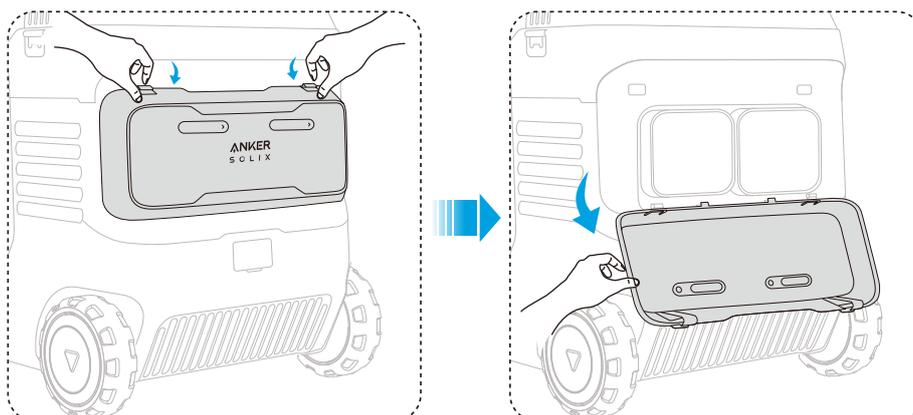

2. Place the battery inside and close the handle. You will hear a click when the installation is successful. If the cooler is turned on, the screen will display "Battery Connected".

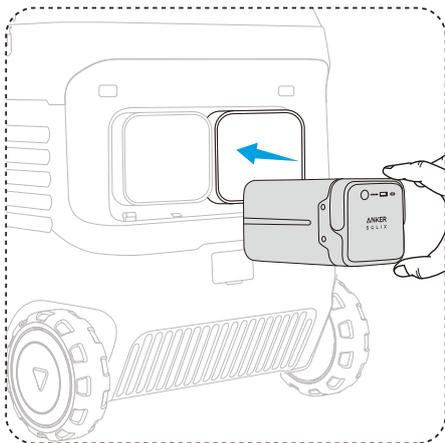


3. Close the battery cover.

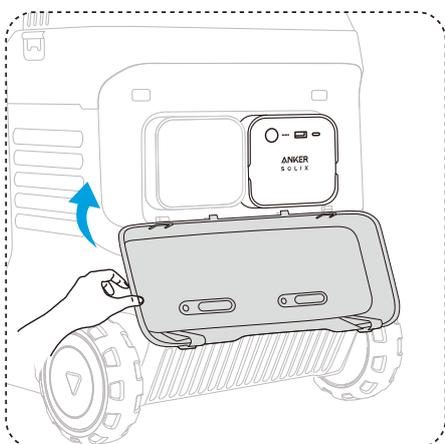


Removing the Battery


1. Open the battery cover.

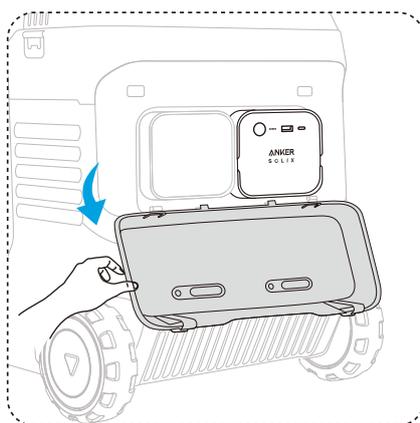

2. Lift the handle and take out the battery.

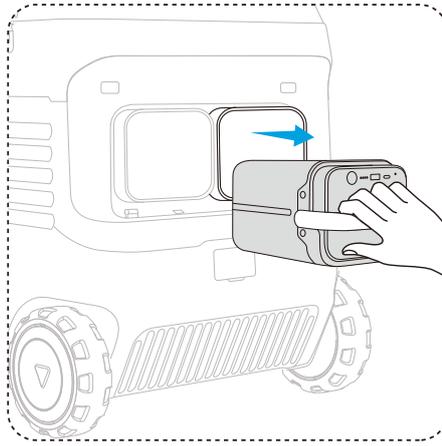


3. Close the battery cover.

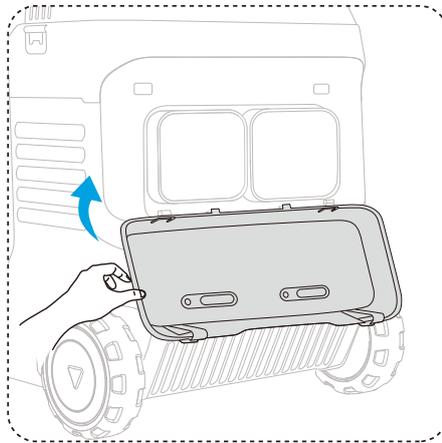


Recharging the Battery

When the battery is in the cooler, the battery will be recharged while the cooler is being charged. When recharging the battery alone, connect it to the wall adapter with a USB-C cable (60W Max).

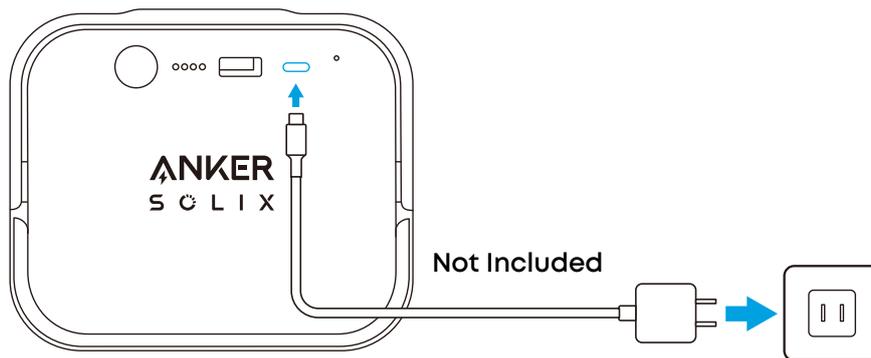

Charging Your Devices

Charge your devices via USB-A or USB-C ports of the battery.

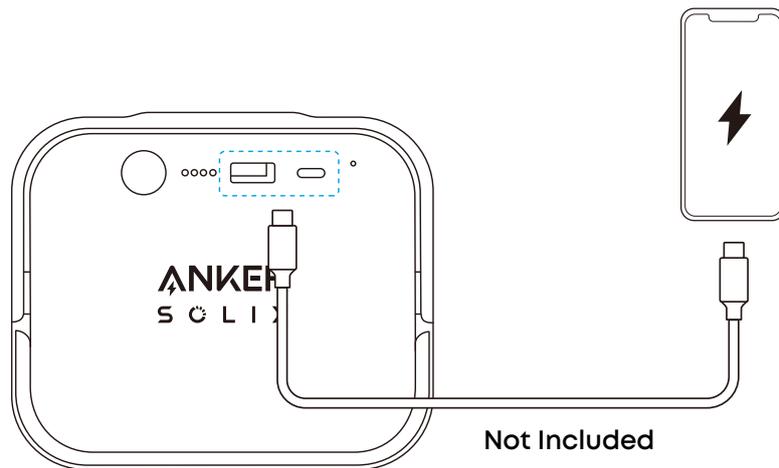

FAQ

1. Why is the battery not working after it hasn't been used for a long time?

If the battery is stored at a low capacity for a long time, lithium batteries will self-consume power which may lead to a quick discharge. This often leads to poor conductivity and a reduced battery lifespan that causes the battery not to work.

2. How should I store and maintain the battery?

- 1) Store the battery in the cooler.
- 2) Store the battery in a dry and cool environment.
- 3) Check the remaining battery capacity each week. If the battery level is below 25%, fully charge it. Don't forget to charge it to 100% once every 3 months.

Specifications

Cell Capacity	288Wh
USB-A Output	5V 2.4A (12W)
USB-C Output	5V = 3A / 9V = 3A / 15V = 3A / 20V = 3A (60W Max)
USB-C Input	5V = 3A / 9V = 3A / 15V = 3A / 20V = 3A (60W Max)
Total Output	72W
Discharging Temperature	-4°F to 104°F / -20°C to 40°C
Charging Temperature	32°F to 104°F / 0°C to 40°C
Size	6.3 × 4.4 × 5.1" / 161 × 111 × 130 mm
Net Weight	5.5 lb / 2.5 kg

Warranty Policy



3-Year Limited Warranty

Scan the QR code for detailed warranty information.

