



©Anker Innovations Limited. All rights reserved, registered in the United States and other countries.


Anker Innovations Limited
Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

Model: T8172, T8030
51005005774_V1

eufy

eufyCam S4

Quick Start Guide

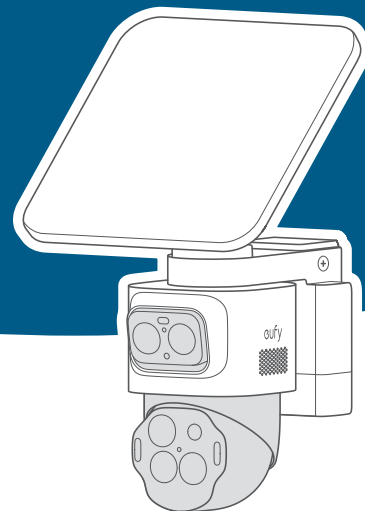

The number of cameras varies.



For Video / User Guide / Support

What's in the Box

Contact support@eufy.com if anything is missing.

For Camera Installation



For Solar Panel Installation



Other




- ❶ Cameras
- ❷ Solar Panel Mounting Brackets
- ❸ Camera Mounting Brackets
- ❹ Positioning Stickers for Solar Panel Mounting Bracket
- ❺ Positioning Stickers for Camera Mount
- ❻ Solar Panel Extension Cables
- ❼ Screw Packs (Camera)
- ⓫ Screw Packs (Solar Panel)
- ❽ USB Charging Cables
- ⓬ QSG
- ❾ Solar Panels



The number of cameras and the types of accessories vary depending on the kit you purchase.

For HomeBase Setup *Only available in 2-cam/4-cam kit.




- ❶ HomeBase S380
- ❷ Ethernet Cable
- ❸ Power Adapter
- ❹ Reset Pin & Hard Drive Screw Pack


Tools You Will Need



At a Glance

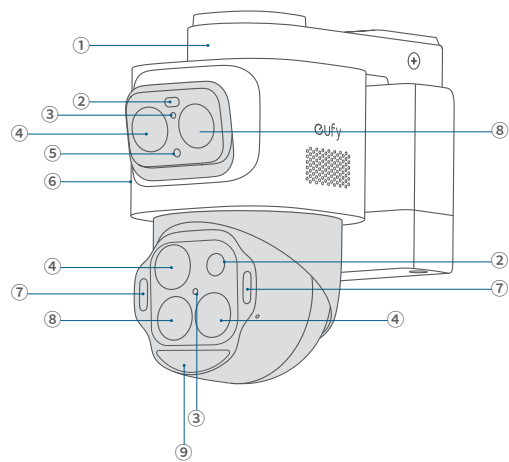

- ① Mounting Base
- ② Spotlight
- ③ Photosensitive Sensor
- ④ Camera Lens
- ⑤ LED Indicator
- ⑥ Speaker
- ⑦ Warning Light
- ⑧ PIR Sensor
- ⑨ Radar Sensor

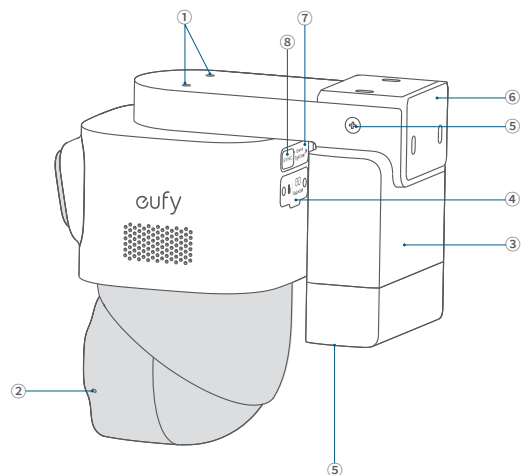

- ① Solar Panel Mounting Holes
- ② Microphone
- ③ Battery Holder
- ④ Fusion Link Port & SD Card Slot
- ⑤ Spring Screw
- ⑥ Mounting Bracket
- ⑦ USB-C Charging Port
- ⑧ SYNC Button

Before Mounting

1. Download eufy App




Make sure your app is updated to the latest version.




2. Fully Charge the Camera

Charge the camera directly or take out the battery for charging.

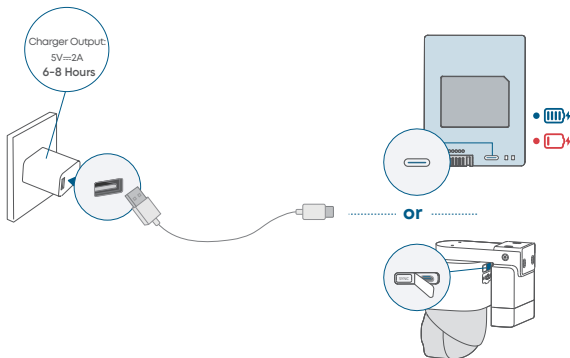


You can check the battery level in the app.


Install/Uninstall the Battery




① Push left to open



② Remove the battery



③ Reinstall the battery




④ Push right to close




⑤ Lock the spring screw

3. Add HomeBase (Optional)


Follow the in-app instructions to add HomeBase.



① Add HomeBase




② Connect



③ Scan via the app

4. Add eufyCam S4

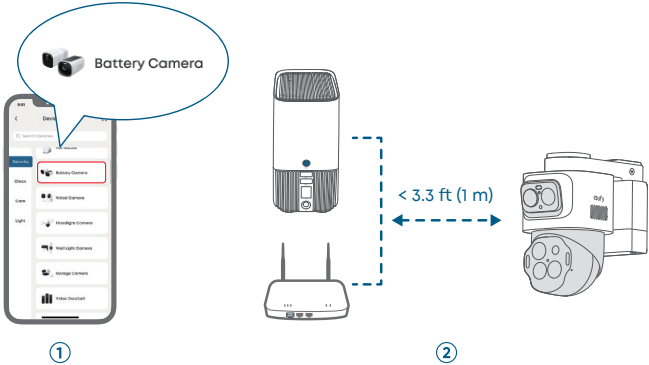


Add camera

Connect to HomeBase or router

5. Recheck in the App

Check before installation:


- Strong Wi-Fi signal
- Smooth live streaming

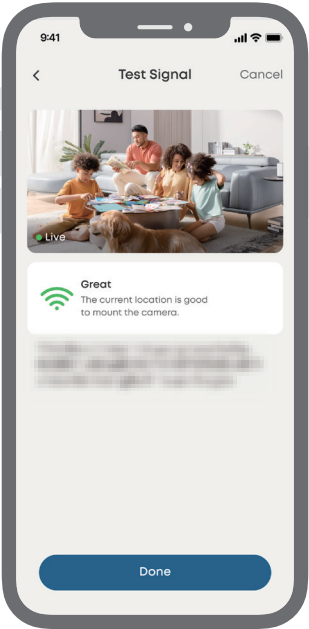



6. Choose a Location

Recommended location:

- Height of 2 m to 3 m (7 ft to 10 ft)
- Where solar panels get enough sunlight
- Strong Wi-Fi signal



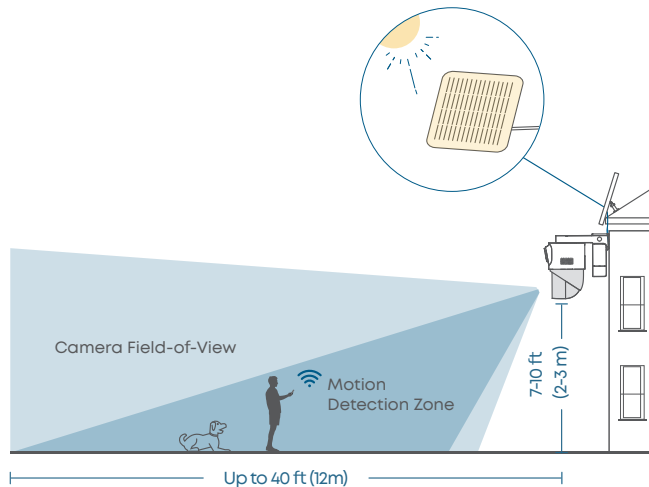


 To avoid missed detections, install the cameras at an angle rather than directly facing the monitoring area.

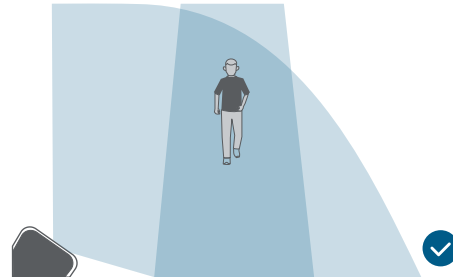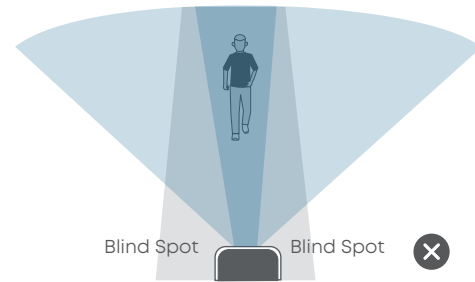


Mount the Solar Panel

Option 1 Flexible Mounting (Best Sunlight)

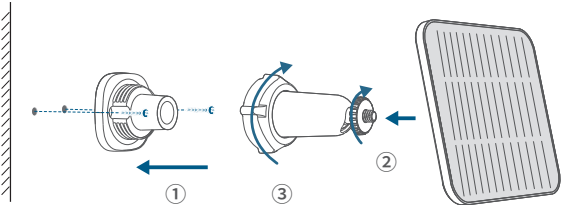


- ① Install the base
- ② Tighten the small knob
- ③ Tighten the large knob


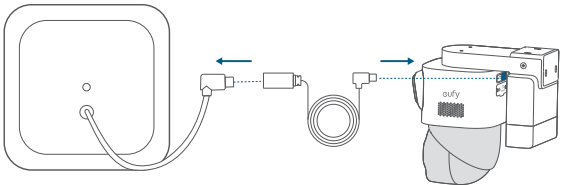


- ④ Connect the solar panel to the camera

Option 2 Integrated Mounting (Less Drilling)

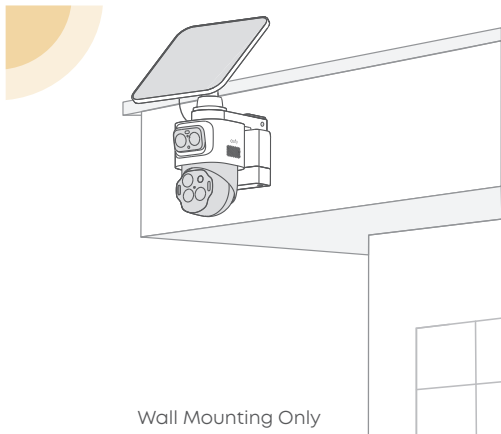


💡 Please use the **8 mm** screws to install the solar panel onto the camera.

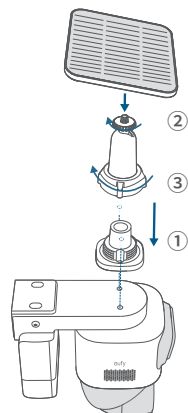


Mount the Camera

Wall Mounting

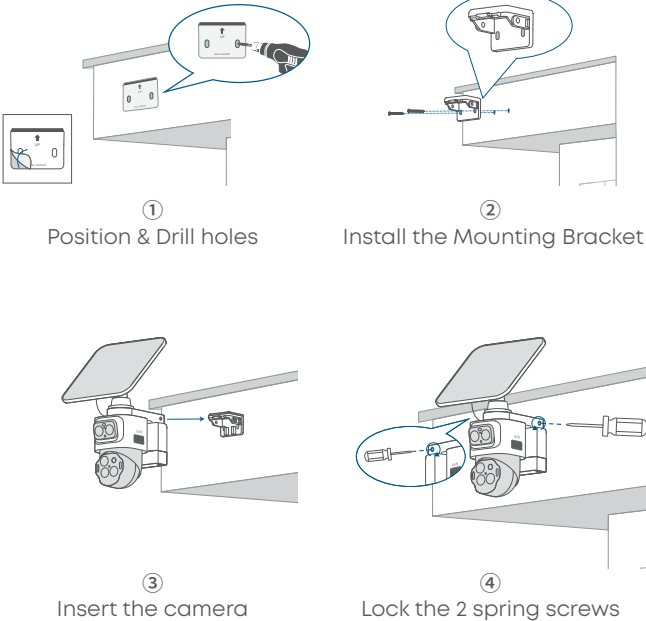


Top Mounting

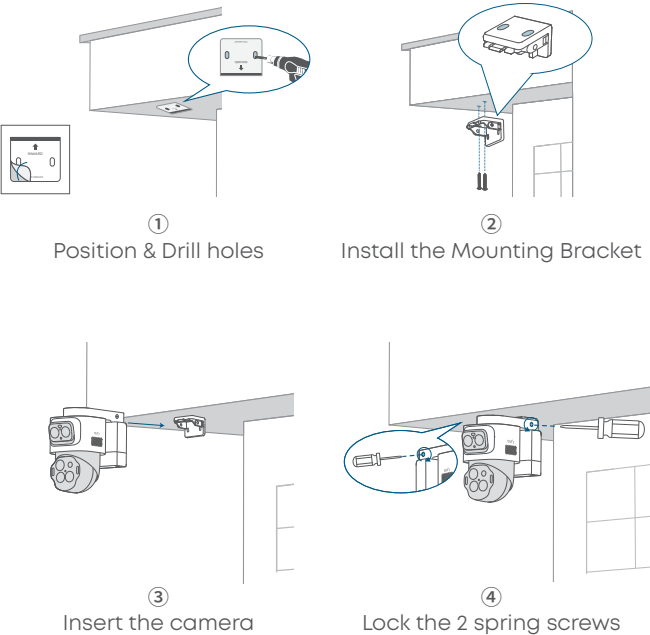


After Mounting

Adjust the Camera Field of View

① Remove the protective film

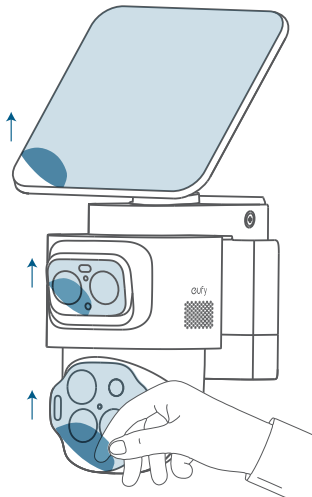


② Rotate the camera to the optimal angle

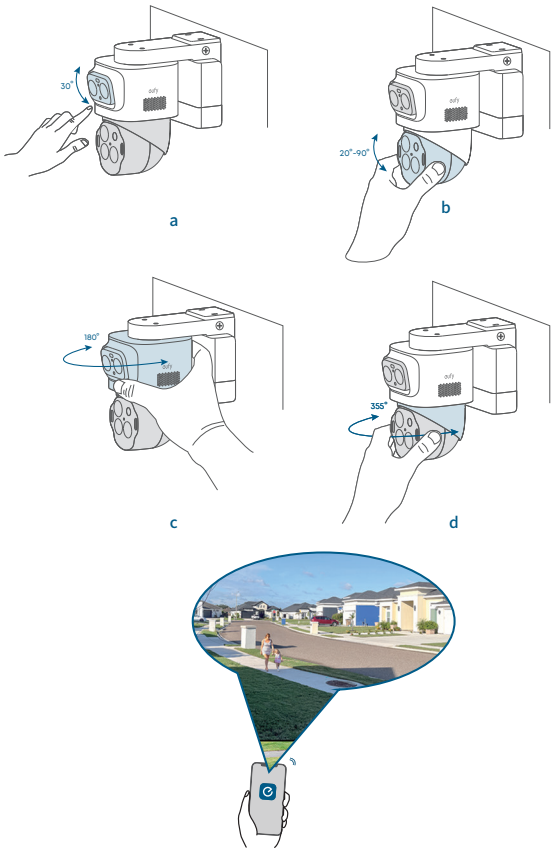


Find Out More

Congratulations! Now you're all set to use your eufyCam S4! Please explore more in the eufy app.

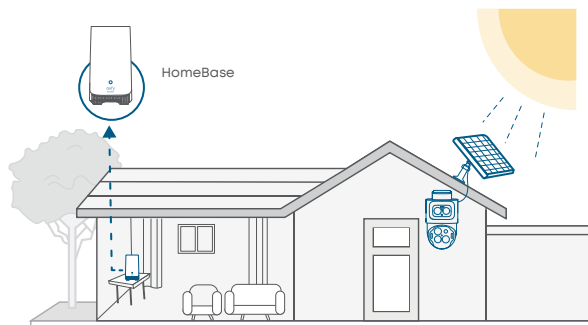


Fusion Link




Fusion Link serves as an expansion port for future eufy accessories, including support for long-range image transmission. Learn more at support.eufy.com.

Set Up the Wired Mode

① Connect the camera to a 5V/2A adapter.

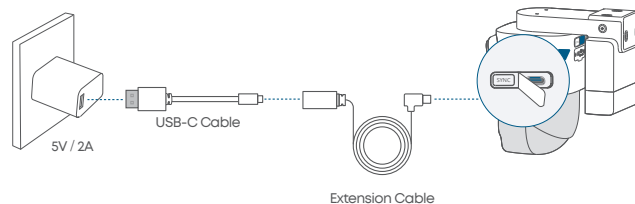

② Switch to Wired Mode in the eufy app and enjoy 24/7 surveillance.

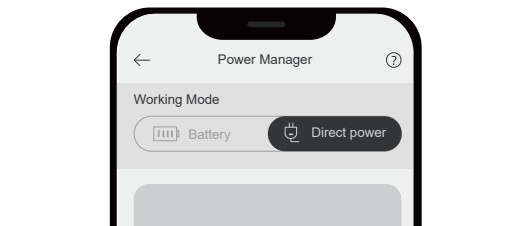

Customer Service



12-month limited warranty



support@eufy.com

support.au.eufy.com (AU)



(US) +1 (800) 988 7973



[@EufyOfficial](#)



[@EufyOfficial](#)



[@EufyOfficial](#)

Australian and New Zealand customers, please scan the QR code for the warranty information:

