

Overview

How to use the Adapter

Using the US Plug

Using the UK plug

Using the EU Plug

Screen Display Guide

Main Screen Features

Specifications



Charging Guide

Power Allocation

FAQs

Compatible Countries & Regions

Overview

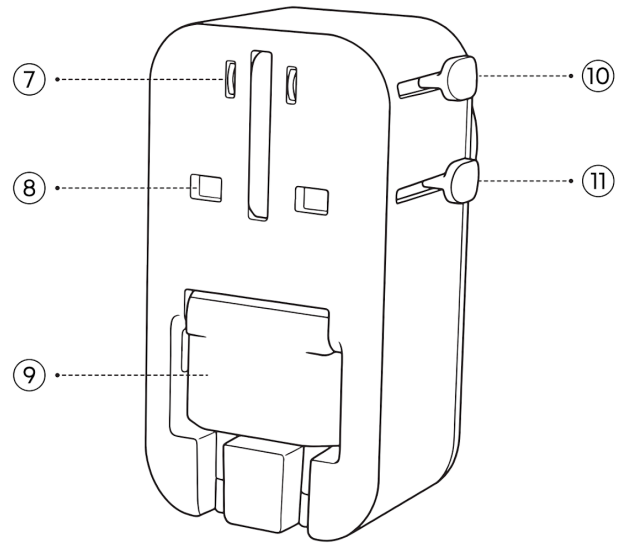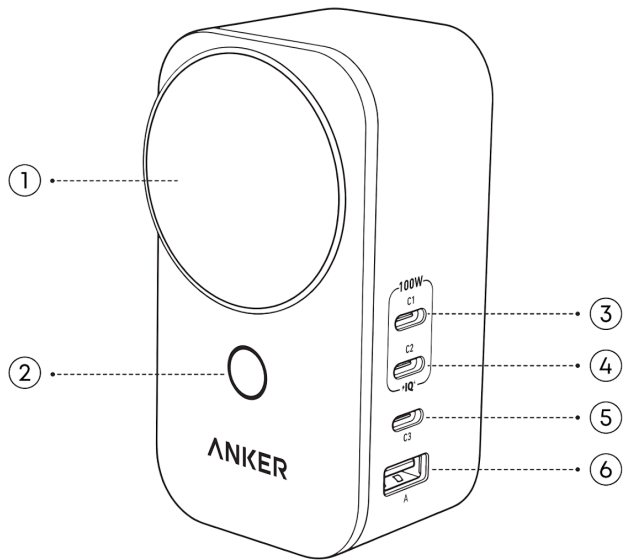

1. Smart Display
2. Touch Button
3. USB-C1
4. USB-C2
5. USB-C3
6. USB-A
7. US/JP Plug
8. UK Plug
9. EU Plug
10. US Plug Slider
11. UK Plug Slider

How to use the Adapter

Attention:


1. Make sure that the slider is properly engaged during use.
2. Use only one AC plug at a time. Using both may result in electric shock.
3. Use one plug type at a time by sliding the selection knob. Other plug pins will automatically lock when one type is selected.

Note: 100-125V regions include the US, Canada, Japan, among others. 220-240V regions include Germany, the UK, Singapore, and more.

WARNING:


Connect your charger to a 2021 Apple MacBook Pro (16") using a USB-C to MagSafe 3 cable to achieve maximum power (100W) from a single port (USB-C1/C2).

Using the US Plug

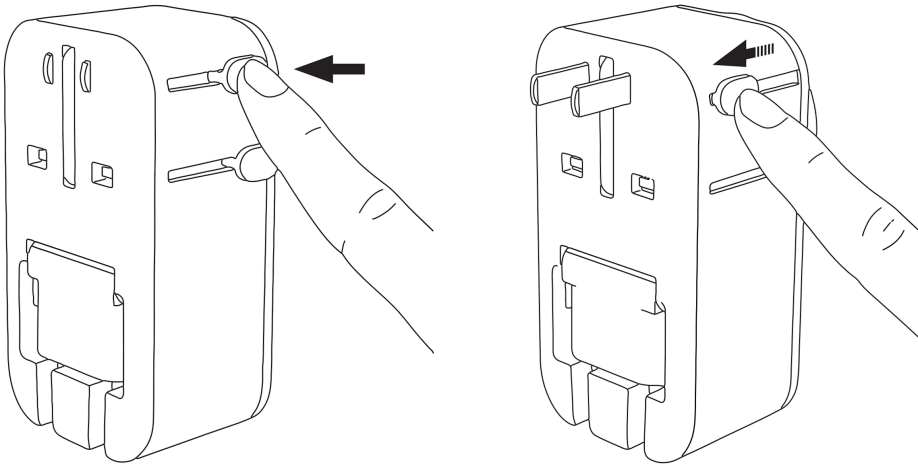

Press and hold the US plug slider and slide it all the way to the left to extend the US plug. To retract the plug, press and hold the US plug slider, then slide it to the right completely.


Using the UK plug

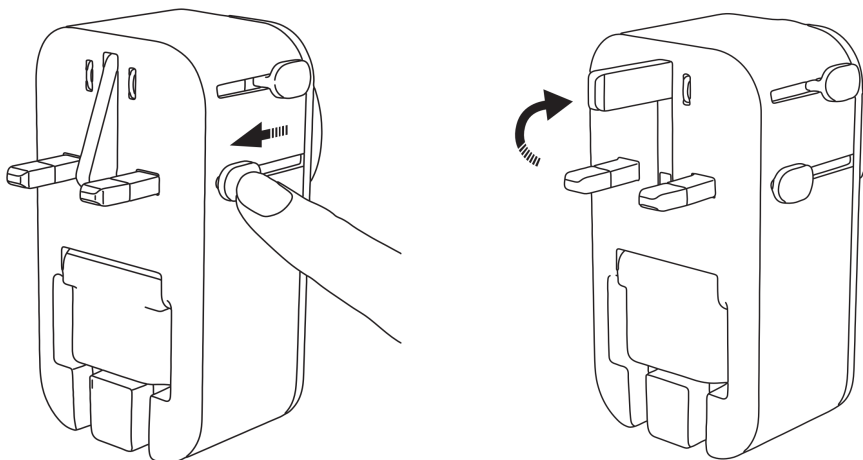

Press and hold the UK plug slider and slide it all the way to the left, then manually lift the middle grounding pin to extend the UK plug.

To retract the plug, press and hold the UK plug slider, slide it to the right completely, and gently press the ground pin back down.


Using the EU Plug

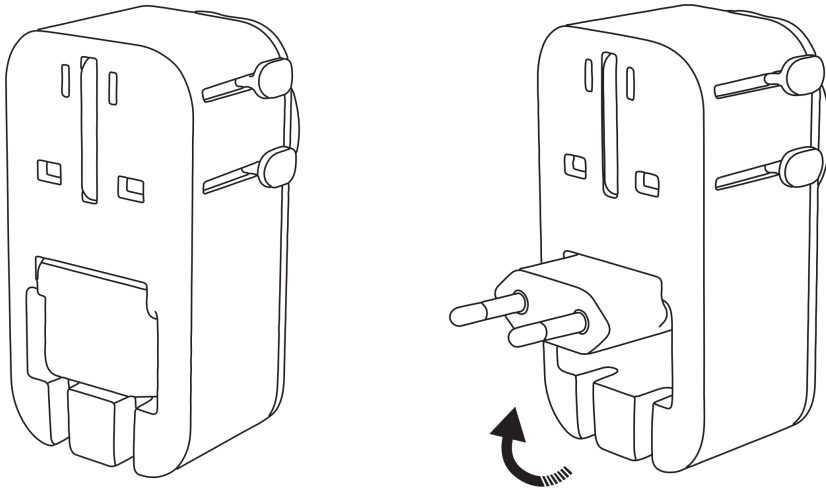

Manually flip up the plug. To retract the plug, gently press it back down into its original position.


WARNING:

During extended charging, the exposed parts of the EU plug pins may become hot. To avoid the risk of burns, do not touch the exposed EU plug pins for more than 1 second.

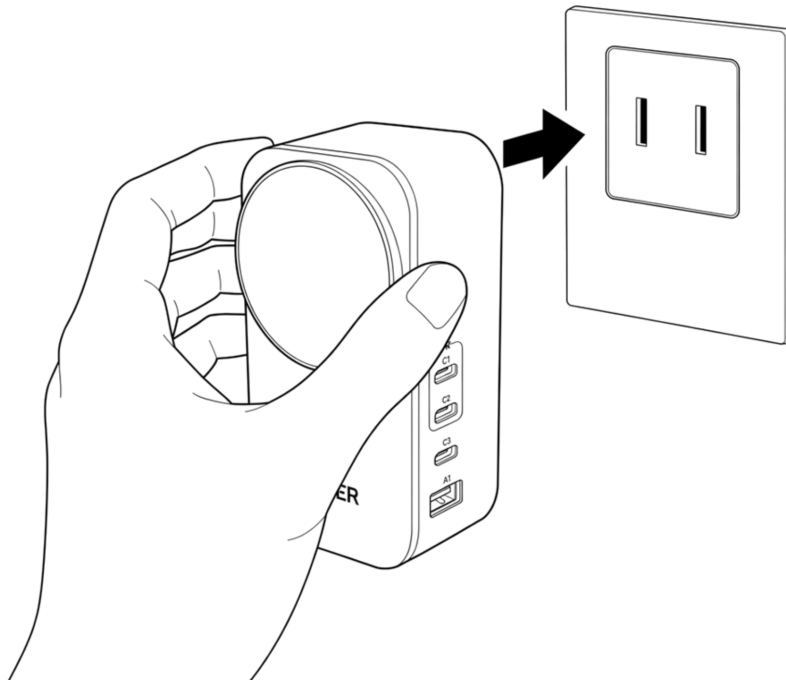


Screen Display Guide

- Single press: Wake the screen or switch between display pages.

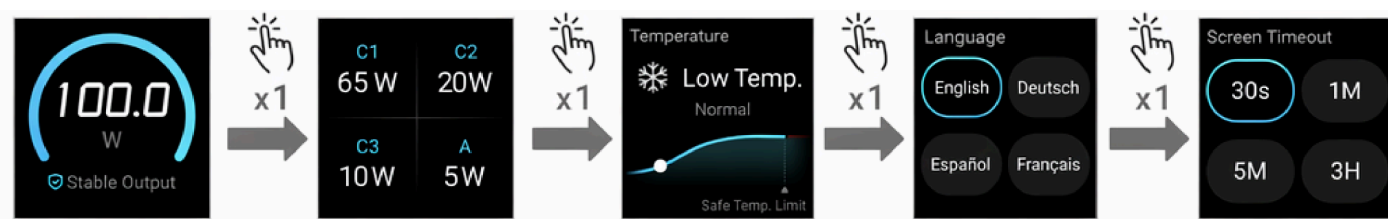


- Double press: Switch between options. The selected option flashes 3 times to confirm.

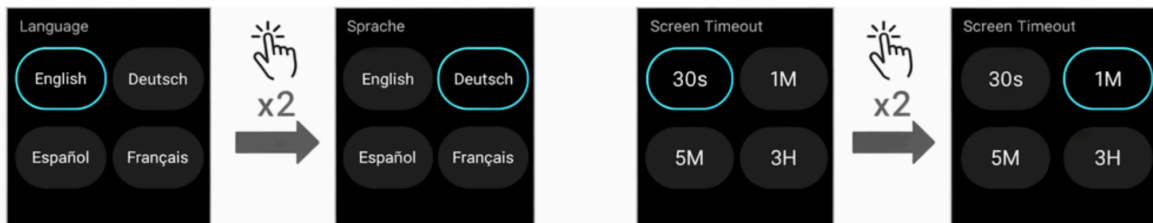

- Press and hold for 2 seconds: Rotate the screen orientation. There are 4 orientation options.



- Press and hold for 15 seconds: Restore factory settings.



Main Screen Features


Startup Animation Page 1

The screen displays the global voltage detection status.




Startup Animation Page 2

The screen displays the adaptation completion status.



Main Page

The screen displays the countries compatible with the current voltage zone (high-voltage zone countries and low-voltage zone countries) .

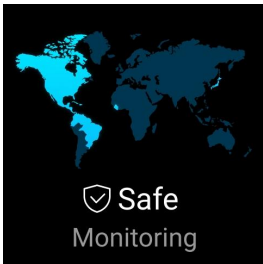 Safe Monitoring	 Safe Monitoring	 Active Protection
90-150V North America and other: low-voltage regions: Monitoring in Real-Time	200-250V Europe and other high-voltage regions: Monitoring in Real-Time	275-320V Grid fluctuation regions: Stabilizing Smartly

Main Page - Total Power

The screen displays the total output power.




Power Page

The screen displays real-time power distribution per port during charging.

C1 65 W	C2 20W
C3 10W	A 5W


Temperature Page

The screen displays a temperature status indicator (numerical values are not shown).




Language Selection Page

The screen displays the available language options. Double press to switch to the next option. The selected option flashes 3 times to confirm.



Screen Timeout Page


The screen displays the screen timeout options: 30s, 1min, 5min, or 3h. Double press to switch to the next option. The selected option flashes 3 times to confirm.



Specifications

Total Wattage	100W Max
Input	100-275V~, 2.1A, 50-60HZ
USB Output	Single port: USB-C1 / C2: 5V=3A / 9V=3A / 15V=3A / 20V=5A (100W Max) USB-C3: 5V=3A (15W Max) USB-A: 5V=2.4A (12W Max) Two Ports / Three Ports / Four Ports in Use: 100W Max

Charging Guide

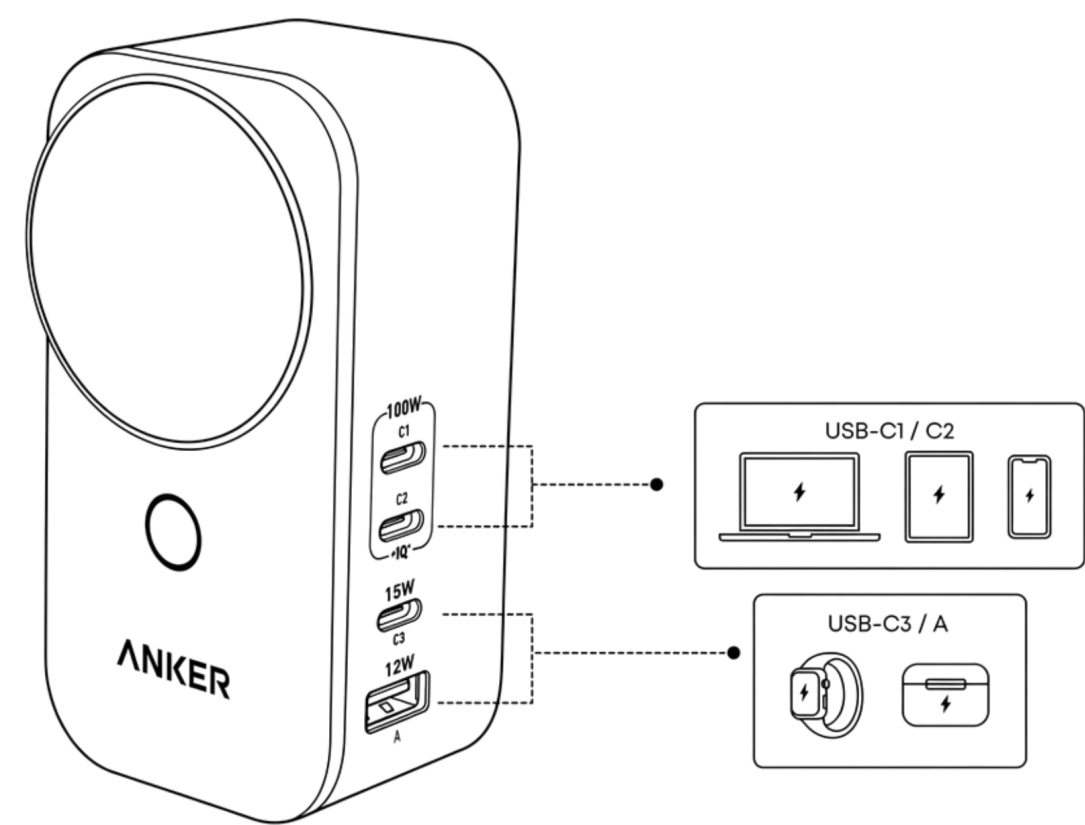


Power Allocation



Port/Combination	Single Port	Two Ports				Three Ports					Four Ports	
		C1+C2	C1/C2+C3	C1/C2+A	C3+A	C1+C2+C3		C1+C2+A		C1/C2+C3+A	C1+C2+C3+A	
C1	100	65	85	88		65	45	68	45		65	45
C2	100	35				20	40	20	43	85	20	40
C3	15		15		15	15	15			15	15	15
A	12			12				12	12			

FAQs

Q: What types of plug standards are supported by the adapter?

A:The Nano Travel Adapter supports plug types in over 200 countries and regions. It is equipped with three essential plug types: Type-A, Type-G, and Type-C, meeting travel needs worldwide. For a detailed list of supported plug types, please refer to the table below.

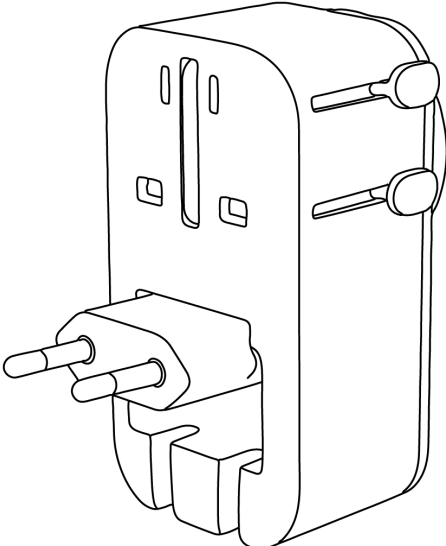Plug Type	Compatible Socket		Compatible Countries & Regions
	Type E		France, Belgium, Poland
	Type L		Italy, Chile, San Marino
	Type F		Germany and Most of Europe
	Type K		Denmark, Greenland
	Type O		Thailand
	Type J		Switzerland
	Type N		Brazil, South Africa
	Type C		Europe

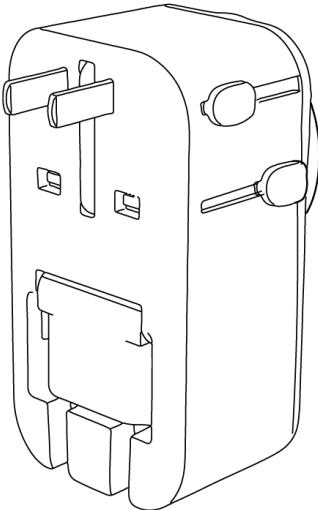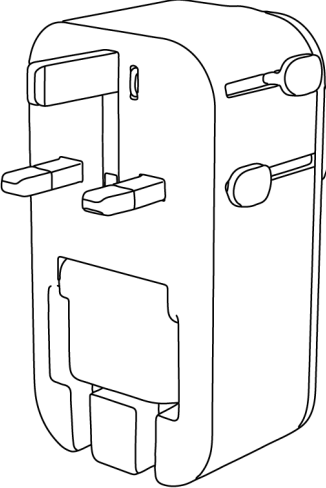	Type A		United States, Canada, Mexico, Japan, Philippines, China
	Type G		United Kingdom, Ireland, Malaysia, Singapore

Q: How many devices can I charge at once?

A: Up to four devices simultaneously via the four USB ports (USB-C1, USB-C2, USB-C3, and USB-A). The charger intelligently distributes up to 100W total power across all connected devices.

Q: How do I get 100W output from a single port?

A: USB-C1 and USB-C2 each support up to 100W output. To achieve maximum 100W, use a USB-C to MagSafe 3 cable with a compatible 2021 Apple MacBook Pro (16-inch). For other high-power devices, use a 100W-rated USB-C to USB-C cable.

Q: Can I use two plugs at the same time?

A: No. For safety reasons, only one plug type can be used at a time. When one plug type is selected via the slider, the other plugs automatically lock. Using two plugs simultaneously may cause electric shock.

Q: Why does the charger feel warm during use? Is this normal?

A: Yes. It is normal for the charger to generate heat during operation, especially when charging multiple high-power devices simultaneously. Ensure proper ventilation and avoid covering the charger during use. Do not touch the surface for extended periods.

Compatible Countries & Regions

Countries & Regions	Voltage (V)	Frequency (Hz)	Plug Type	AGC Compatible
Abu Dhabi	230	50	G	✓
Albania	230	50	C, F	✓
Algeria	230	50	C, F	✓
Afghanistan	220	50	C, F	✓
Argentina	220	50	C, I	✓
Ireland	230	50	G	✓
Egypt	220	50	C, F	✓
Ethiopia	220	50	C, F, L	✓
Estonia	230	50	C, F	✓
United Arab Emirates	230	50	G, M	✓
Aruba	127	60	A, B, F	✓
Oman	240	50	G	✓
Andorra	230	50	C, F	✓
Angola	220	50	C	✓
Anguilla	110	60	A	✓
Antigua and Barbuda	230	60	A, B	✓
Australia	230	50	I	✗
Austria	230	50	C, F	✓
Macau	220	50	D, F, G, M	✓
Azerbaijan	220	50	C, F	✓
Barbados	115	50	A, B	✓
Papua New Guinea	240	50	I	✗

Bahamas	120	60	A, B	✓
Belarus	220	50	C, F	✓
Bermuda	120	60	A, B	✓
Pakistan	230	50	C, D, G, M	✓
Paraguay	220	50	C	✓
Palestine	230	50	C, H, M	✓
Bahrain	230	50	G	✓
Panama	110	60	A, B	✓
Bulgaria	230	50	C, F	✓
Brazil	127/220	60	C, N	✓
Northern Mariana Islands	120	60	A, B	✓
North Macedonia	230	50	C, F	✓
Benin	220	50	C, E	✓
Northern Cyprus	230	50	G	✓
Belgium	230	50	C, E	✓
Peru	220	60	A, B, C	✓
Iceland	230	50	C, F	✓
Botswana	230	50	D, G, M	✓
Puerto Rico	120	60	A, B	✓
Bosnia and Herzegovina	230	50	C, F	✓
Poland	230	50	C, E	✓
Bolivia	115/230	50	A, C	✓
Belize	110/220	60	A, B, G	✓
Bonaire	127	50	A, C	✓
Bhutan	230	50	C, D, F, G, M	✓

Burkina Faso	220	50	C, E	✓
Burundi	220	50	C, E	✓
North Korea	220/110	50/60	A, C, F	✓
Equatorial Guinea	220	50	C, E	✓
Denmark	230	50	C, E, F, K	✓
Germany	230	50	C, F	✓
Dubai	230	50	G	✓
Timor-Leste	220	50	C, E, F, I	✓
Togo	220	50	C	✓
Dominican Republic	110	60	A, B	✓
Dominica	230	50	D, G	✓
Ecuador	120	60	A, B	✓
Eritrea	230	50	C, L	✓
Russia	220	50	C, F	✓
France	230	50	C, E	✓
Faroe Islands	230	50	C, E, F, K	✓
Vatican City	230	50	C, F, L	✓
French Polynesia	220	60	C, E	✓
French Guiana	220	50	C, D, E	✓
Fiji	240	50	I	✗
Philippines	230	60	A, B, C	✓
Finland	230	50	C, F	✓
Cape Verde	220	50	C, F	✓
Falkland Islands	240	50	G	✓
Gambia	230	50	G	✓

Congo (Republic)	230	50	C, E	✓
Congo (DRC)	220	50	C, D, E	✓
Greenland	230	50	C, E, F, K	✓
Grenada	230	50	G	✓
Georgia	220	50	C, F	✓
Colombia	110	60	A, B	✓
Costa Rica	120	60	A, B	✓
Guadeloupe	230	50	C, D, E	✓
Guam	110	60	A, B	✓
Cuba	110	60	A, B	✓
Guyana	240	60	A, B, D, G	✓
Haiti	110	60	A, B	✓
Channel Islands	230	50	C, G	✓
South Korea	220	60	C, F	✓
Kazakhstan	220	50	C, F	✓
Montenegro	230	50	C, F	✓
Netherlands	230	50	C, F	✓
Netherlands Antilles	127/220	50	A, B, C, F	✓
Honduras	110	60	A, B	✓
Ghana	230	50	D, G	✓
Canada	120	60	A, B	✓
Canary Islands	230	50	C, E, F	✓
Cambodia	230	50	A, C, G	✓
Gabon	220	50	C	✓
Gaza Strip	230	50	C, H	✓

Djibouti	220	50	C, E	✓
Czech Republic	230	50	C, E	✓
Kyrgyzstan	220	50	C, F	✓
Kiribati	240	50	I	✗
Zimbabwe	220	50	D, G	✓
Guinea	220	50	C, F, K	✓
Guinea-Bissau	220	50	C	✓
Cayman Islands	120	60	A, B	✓
Cameroon	220	50	C, E	✓
Qatar	240	50	G	✓
Cocos (Keeling) Islands	230	50	I	✗
Croatia	230	50	C, F	✓
Comoros	220	50	C, E	✓
Kenya	240	50	G	✓
Kosovo	230	50	C, F	✓
Côte d'Ivoire	230	50	C, E	✓
Kuwait	240	50	C, G, M	✓
Cook Islands	240	50	I	✗
Curaçao	127	50	A, B, C, F	✓
Lesotho	220	50	M	✗
Laos	230	50	A, B, C, E, F	✓
Latvia	230	50	C, F	✓
Lebanon	220	50	A, B, C, D, G	✓
Liberia	120/220	50/60	A, B, C, E, F	✓
Libya	127/230	50	C, D, F, L	✓

Liechtenstein	230	50	C, J	✓
Lithuania	220	50	C, F	✓
Réunion	220	50	E	✓
Romania	230	50	C, F	✓
Luxembourg	230	50	C, F	✓
Rwanda	230	50	C, E, F, G	✓
Madagascar	127/220	50	C, D, E, J, K	✓
Madeira	230	50	C, F	✓
Isle of Man	240	50	C, G	✓
Maldives	230	50	C, D, G, J, K, L	✓
Malta	230	50	G	✓
Malaysia	240	50	A, C, G, M	✓
Malawi	230	50	G	✓
Mali	220	50	C, E	✓
Mauritius	230	50	C, G	✓
Mauritania	220	50	C	✓
Marshall Islands	120	60	A, B	✓
Martinique	220	50	C, D, E	✓
Mayotte	230	50	C, E	✓
United States	120	60	A, B	✓
American Samoa	120	60	A, B, F, I	✓
US Virgin Islands	110	60	A, B	✓
Mongolia	220	50	C, E	✓
Bangladesh	220	50	C, D, G, K	✓
Montserrat	230	60	A, B	✓

Myanmar	230	50	A, C, D, G, I	✓
Micronesia	120	60	A, B	✓
Moldova	220	50	C, F	✓
Morocco	127/220	50	C, E	✓
Monaco	230	50	C, D, E, F	✓
Mozambique	220	50	C, F, M	✓
Mexico	127	60	A, B	✓
Namibia	220	50	D, M	x
South Africa	230	50	C, M, N	✓
South Sudan	230	50	C, D	✓
Nauru	240	50	I	x
Nicaragua	120	60	A, B	✓
Nepal	230	50	C, D, M	✓
Niger	220	50	A, B, C, D, E, F	✓
Nigeria	230	50	D, G	✓
Niue	230	50	I	x
Norfolk Island	230	50	I	x
Norway	230	50	C, F	✓
Palau	120	60	A, B	✓
Pitcairn Islands	230	50	G, I	✓
Portugal	230	50	C, F	✓
Japan	100	50/60	A, B	✓
Sweden	230	50	C, F	✓
Switzerland	230	50	C, J	✓
Saba	110	60	A, B	✓

El Salvador	115	60	A, B	✓
Serbia	230	50	C, F	✓
Sierra Leone	230	50	D, G	✓
Senegal	230	50	C, D, E, K	✓
Cyprus	240	50	G	✓
Seychelles	240	50	G	✓
Samoa	230	50	I	x
Saudi Arabia	220/230	60	G	✓
Saint Barthélemy	230	50	C, E	✓
Christmas Island	230	50	I	x
São Tomé and Príncipe	220	50	C, F	✓
Saint Helena	230	50	G	✓
Saint Kitts and Nevis	230	60	A, B, D, G	✓
Saint Lucia	240	50	G	✓
Saint Martin	120/220	60	C, F	✓
San Marino	230	50	C, F, L	✓
Saint Pierre and Miquelon	230	50	C, E	✓
Saint Vincent & Grenadines	230	50	A, C, E, G, I, K	✓
Sint Eustatius	110	60	A, B, C, F	✓
Sri Lanka	230	50	D, G, M	✓
Slovakia	230	50	C, E	✓
Slovenia	230	50	C, F	✓
Svalbard	230	50	C, F	✓
Eswatini (Swaziland)	230	50	M	x
Sudan	230	50	C, D	✓

Suriname	127	60	C, F	✓
Solomon Islands	220	50	G, I	✓
Somalia	220	50	C	✓
Somaliland	220	50	C, G	✓
Thailand	220	50	A, B, C, F, O	✓
Taiwan	110	60	A, B	✓
Tajikistan	220	50	C, F, I	✓
Tonga	240	50	I	✗
Tanzania	230	50	D, G	✓
Turks and Caicos Islands	120	60	A, B	✓
Trinidad and Tobago	115	60	A, B	✓
Turkey	220	50	C, F	✓
Turkmenistan	220	50	B, C, F	✓
Tunisia	230	50	C, E	✓
Tokelau	230	50	I	✗
Tuvalu	220	50	I	✗
Wallis and Futuna	220	50	C, E, F	✓
Vanuatu	220	50	C, G, I	✓
Guatemala	120	60	A, B	✓
Venezuela	120	60	A, B	✓
Brunei Darussalam	240	50	G	✓
Uganda	240	50	G	✓
Ukraine	220	50	C, F	✓
Uruguay	230	50	C, F, L	✓
Uzbekistan	220	50	C, I	✓

West Bank	230	50	C, H	✓
Hong Kong	220	50	D, G	✓
Spain	230	50	C, F	✓
Greece	230	50	C, F	✓
Singapore	230	50	C, G, M	✓
New Caledonia	220	50	C, F	✓
New Zealand	230	50	I	x
Hungary	230	50	C, F	✓
Western Sahara	220	50	C, E	✓
Syria	220	50	C, E, L	✓
Jamaica	110	50	A, B	✓
Armenia	230	50	C, F	✓
Jan Mayen	230	50	C, F	✓
Azores	230	50	A, B, C, F	✓
Yemen	240	50	D, G, M	✓
Italy	230	50	C, F, L	✓
Iraq	230	50	C, D, G	✓
Iran	220	50	C, F	✓
India	230	50	C, D, M	✓
Indonesia	220/110	50	C, F	✓
United Kingdom	230	50	G	✓
British Virgin Islands	110	60	A, B	✓
Israel	230	50	C, H	✓
Jordan	230	50	B, C, D, F, G, J	✓
Vietnam	220	50	A, B, C	✓

Zambia	230	50	C, D, G	✓
Chad	220	50	C, D, E, F	✓
Gibraltar	240	50	C, G	✓
Chile	220	50	C, L	✓
Central African Republic	220	50	C, E	✓
China	220	50	A, C, I	✓